


- **Increased Ionized Hydro-Peroxide Output**
- **New Enhanced Catalyst With Zinc For Faster Kill Rates**
- **Easier, Faster, No Tool Cell Replacement**




The REME HALO[®] by RGF[®] is the next generation of IAQ technology. RGF[®] has redesigned their REME[®] HVAC unit with higher Ionized Hydro-peroxide output, which gives faster kill rates for microbials in the air as well as on surfaces. Also, this higher output drops more particulate from the air bringing relief to those who suffer from allergies and other respiratory issues.

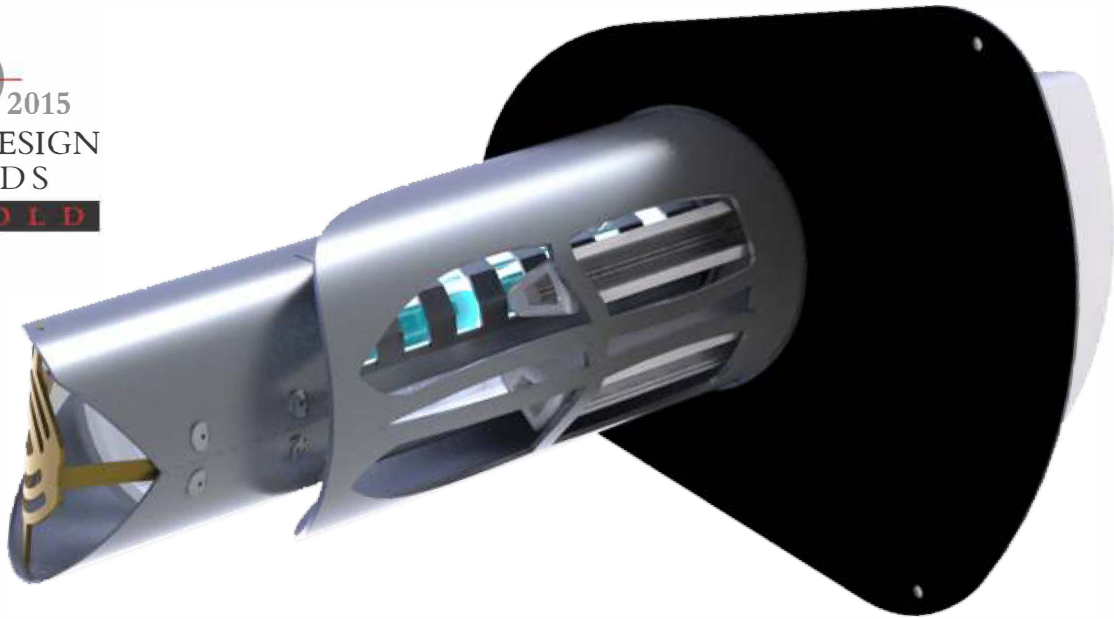

Quick Release Feature


The REME HALO[®] now features a quick release design for easy removal of the housing to allow easy replacement of the REME[®] cell.

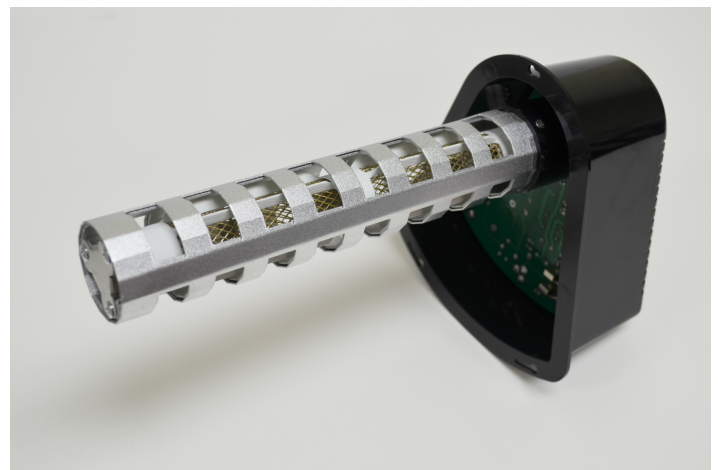


Adjustable Output

The REME HALO[®] incorporates an adjustable shroud, which allows the customization of the AOP output.


The REME HALO® by RGF® is designed to eliminate sick building syndrome risks by reducing odors, air pollutants, VOCs (chemical odors), smoke, mold, bacteria and viruses. The REME HALO® units are easily mounted into air conditioning and heating systems air ducts where most sick building problems start. When the HVAC system is in operation, the REME HALO® unit creates an Advanced Oxidation Plasma consisting of Ionized Hydro-peroxides, Super oxide ions and Hydroxide ions. All are friendly oxidizers. By friendly oxidizers, we mean oxidizers that revert back to oxygen and hydrogen after the oxidation of the pollutant.

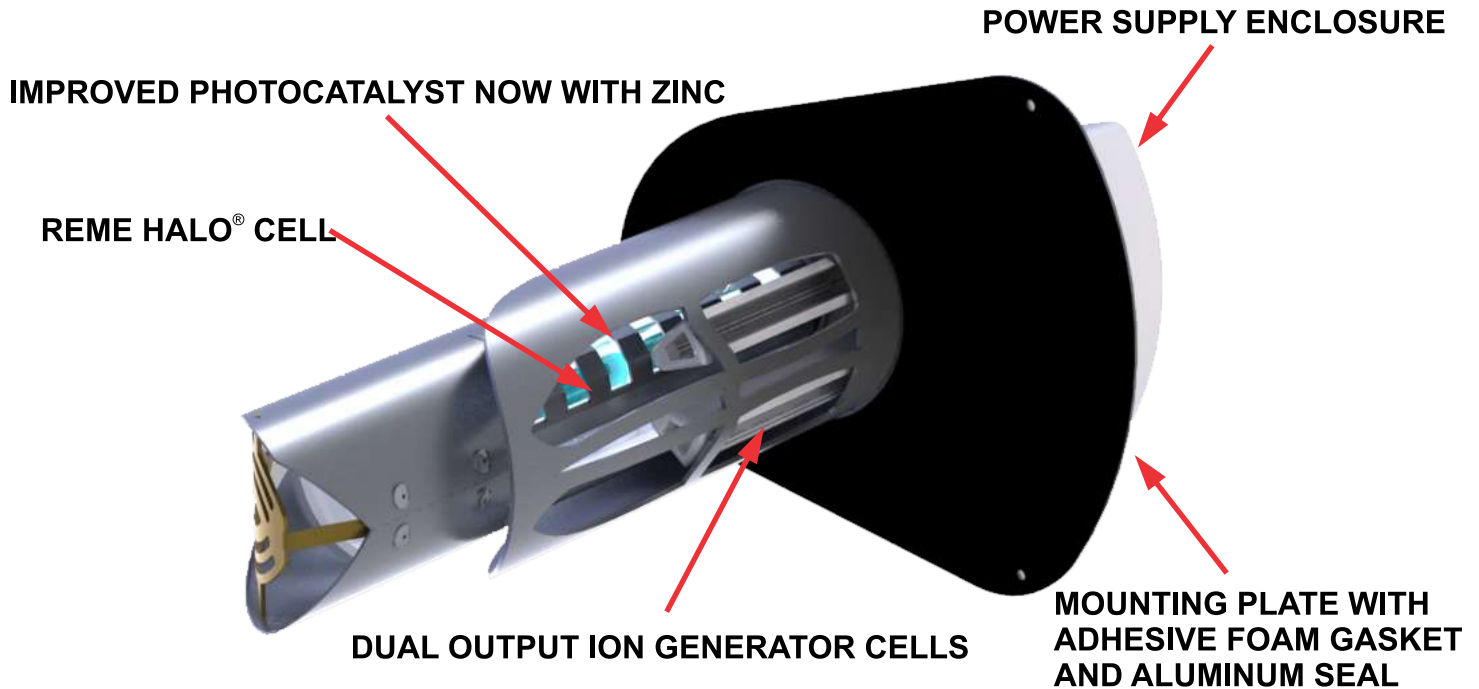


MICROBIALS

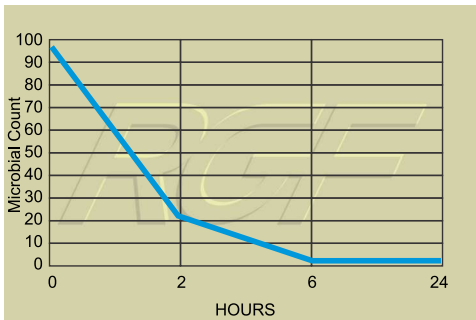

ODORS

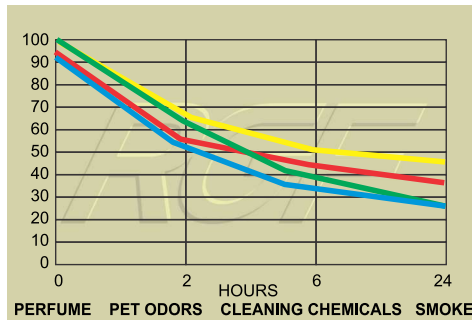

PARTICULATE

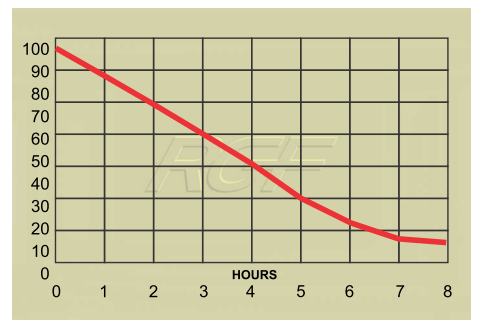

SPECIFICATIONS

Item #	HVAC Blower Size	Electrical	Dimensions	Ship Wt	Replacement Cell
REME-H	1,000 to 6,500 CFM	24 VAC 0.7 Amps 17 Watts	12" probe / 5.5" diameter plate	6 lbs	PHIC-RH

- Installation: Aluminum and Polymers
- Electrical: Recommended after 25,000 hrs
- Materials: 1,000 - 6,500 CFM